

CURRENT 5.0 Ampere
VOLTAGE RANG 50 to 1000 Volts

GS5AB THRU GS5MB


FEATURES

Plastic package has underwrites laboratory flammability
Classification 94V-0
For surface mounted applications
Low profile package
Built-in strain relief, ideal for automated placement
Glass Passivated chip junction
High temperature soldering:
250 /10 second at terminals

MECHANICAL DATA

Case: JEDED DO-214AA molded plastic over glass passivated chip
Terminals: Solder plated, Solderable per MIL-STD-750, method 2026
Polarity: Color band denotes cathode end
Weight: 0.003ounce, 0.093 gram

DO-214AA (SMB)

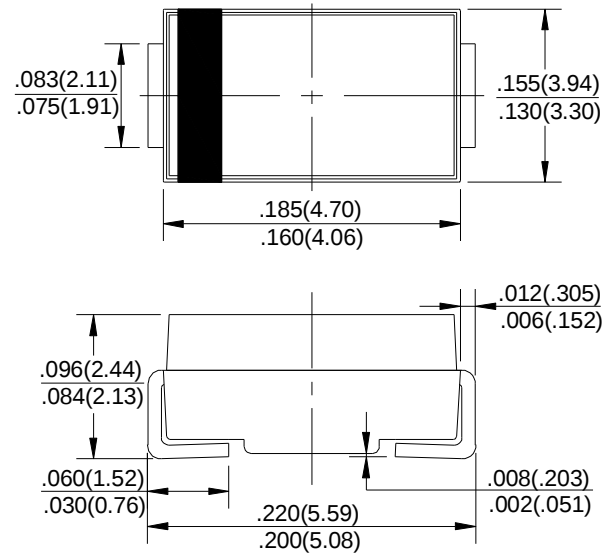

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 ambient temperature unless otherwise specified

		SYMBOLS	GS5A	GS5B	GS5D	GS5G	GS5J	GS5K	GS5M	UNIT
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at T _L =100 (NOTE 3)		I _(AV)	5.0							Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method) T _L =100		I _{FSM}	100							Amps
Maximum Instantaneous Forward Voltage at 5.0A		V _F	1.15							Volts
Maximum DC Reverse Current at rated DC Blocking Voltage	T _A = 25	I _R	10.0							UA
	T _A = 125		250							
Typical Reverse Recovery Time (NOTE 1)		t _{rr}	2							us
Typical junction capacitance (NOTE 2)		C _J	60							pF
Typical Thermal Resistance (NOTE 3)		R _{θJL}	47							/W
		R _{θJA}	13							
Operating Junction and Storage Temperature Range		T _J , T _{STG}	-55 to +150							

Notes:


- Reverse recovery test conditions: $I_F=0.5A$, $I_R=1.0A$, $I_{rr}=0.25A$
- Measured at 1.0MHz and applied reverse voltage of 4.0 Volts
- Thermal resistance from Junction to ambient and from junction to lead mounted on P.C.B.with 0.3×0.3" (8.0 × 8.0mm) copper pad areas.

CURRENT 5.0 Ampere
VOLTAGE RANG 50 to 1000 Volts


GS5AB THRU GS5MB

RATING AND CHARACTERISTIC CURVES GS5A Thru GS5M


F1G.1-FORWARD CURRENT DERATING CURVE

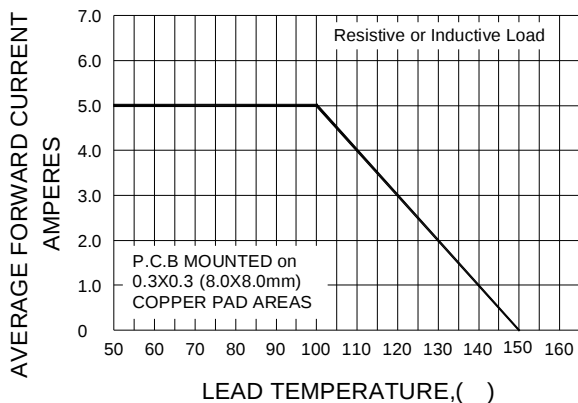


F1G.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

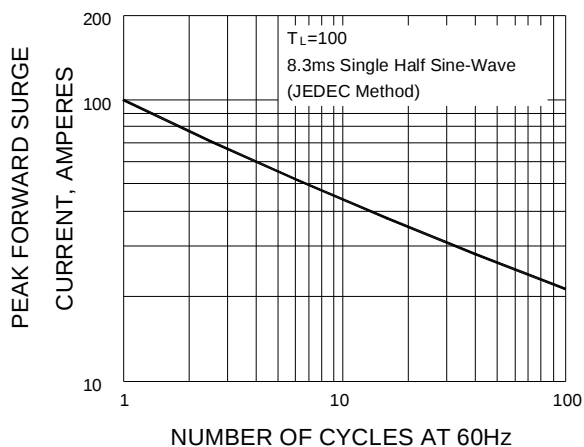


F1G.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

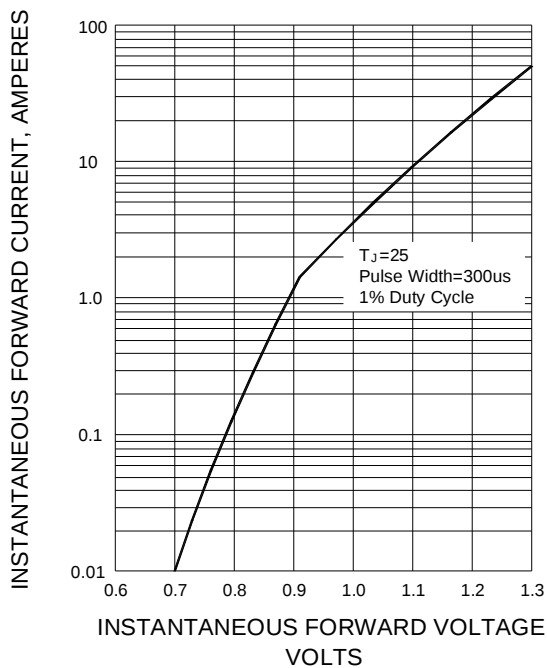

F1G.4-TYPICAL REVERSE CHARACTERISTICS

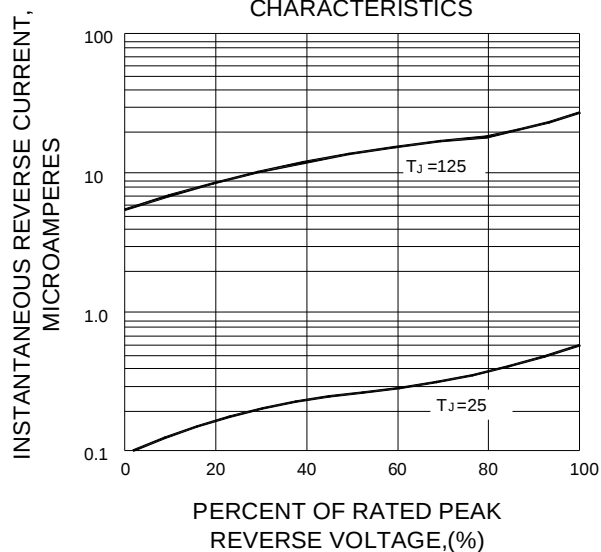

F1G.5-TYPICAL JUNCTION CAPACITANCE

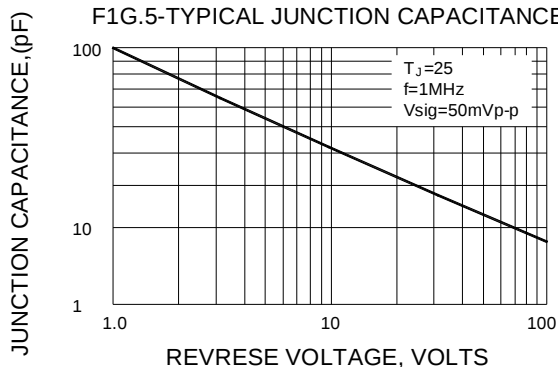

F1G.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

