

CURRENT 2.0 Ampere
 VOLTAGE RANG 20 to 100 Volts


KMB24S THRU KMB210S

Features

- Low profile package
- Ideal for automated placement
- Ultrafast reverse recovery time
- Low power losses, high efficiency
- Low forward voltage drop
- High surge capability
- High temperature soldering:
260°C/10 seconds at terminals
- Component in accordance to
RoHS 2002/95/1 and WEEE 2002/96/EC

Mechanical Data

- Case:** MBS molded plastic body over Schottky barrier chips
- Terminals:** Solder plated, solderable per J-STD-002B and JESD22-B102D
- Polarity:** Polarity symbols marked on body

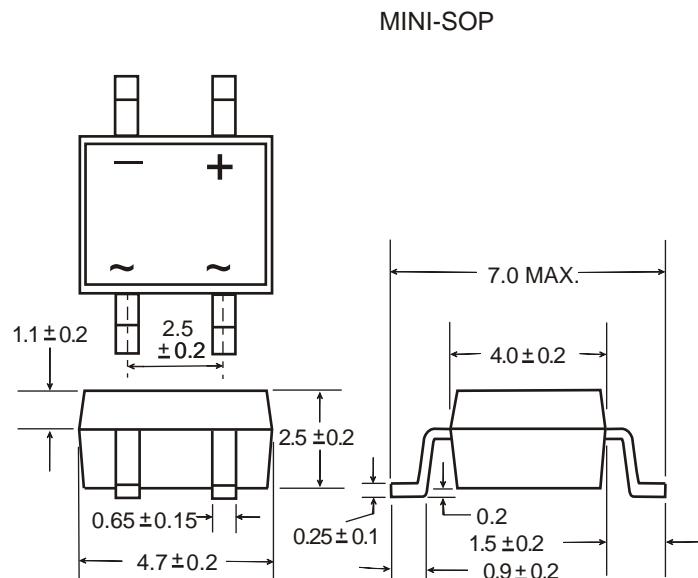

Dimensions in millimeters(1mm = 0.0394")

Maximum Ratings & Thermal Characteristics & Electrical Characteristics

(T_A = 25 °C unless otherwise noted)

	Symbol	KMB22S	KMB24S	KMB26S	KMB28S	KMB210S	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	20	40	60	80	100	V
Maximum RMS voltage	V _{RMS}	14	28	42	56	70	V
Maximum DC blocking voltage	V _{DC}	20	40	60	80	100	V
Maximum average forward rectified current 0.2×0.2"(5.0×5.0mm)copper pad area	I _{F(AV)}				2.0		A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I _{FSM}				50		A
Maximum instantaneous forward voltage at 1.0A	V _F	0.50	0.55	0.70	0.85		V
Maximum DC reverse current T _A = 25 °C at Rated DC blocking voltage T _A = 100°C	I _R			0.5	20		mA
Typical Junction Capacitance at 4.0V,1.0MHz	C _J		250		125		pF
Typical Thermal resistance (Note1)	R _{θJA} R _{θJL}			85 20			°C/W
Operating junction temperature range	T _J			-55 to +125			°C
Storage temperature range	T _{STG}			- 55 to +150			°C

Note: 1.Thermal resistance from junction to ambient and from junction to lead P.C.B.mouted on 0.2×0.2"(5.0×5.0mm)copper pad areas.

CURRENT 2.0 Ampere
VOLTAGE RANG 20 to 100 Volts

KMB24S THRU KMB210S

Rating and Characteristic Curves (TA=25°C Unless otherwise noted)

Fig.1 Forward Current Derating Curve

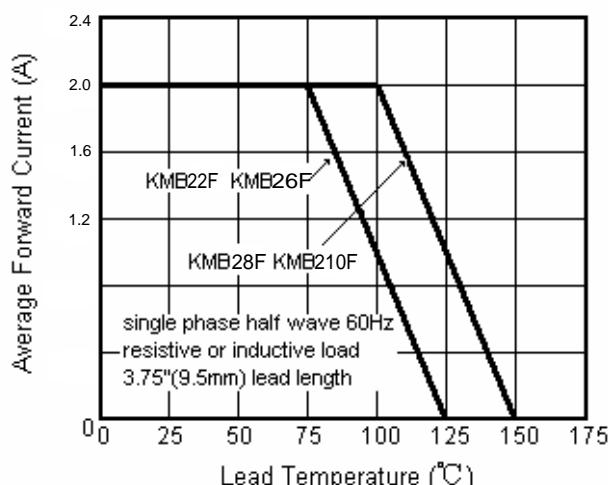


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

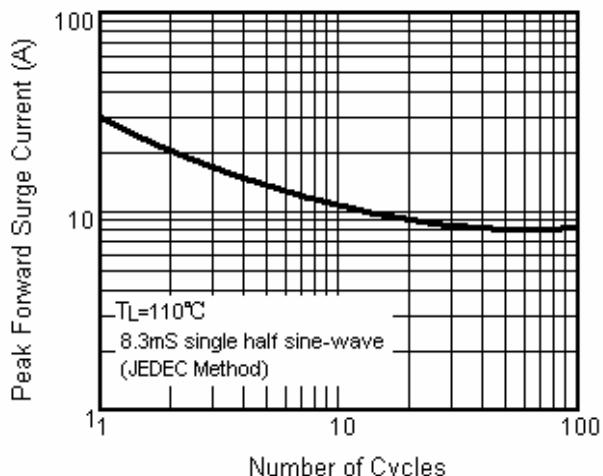


Fig.3 Typical Instantaneous Forward Characteristics

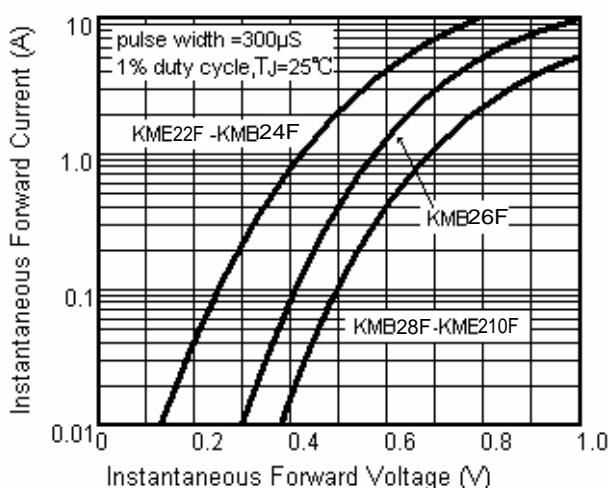


Fig.4A Typical Reverse Characteristics

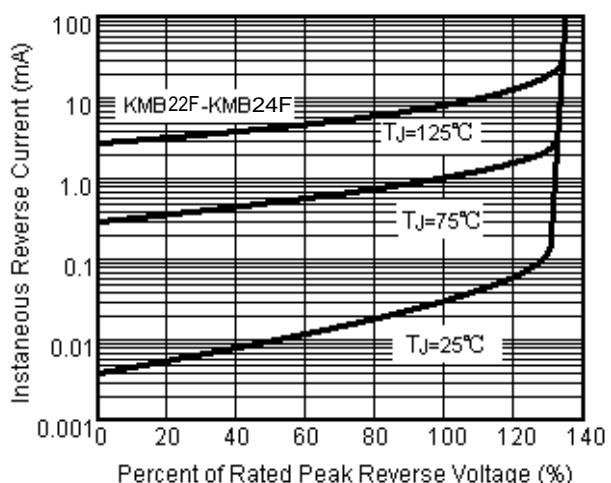


Fig.5 Typical Junction Capacitance

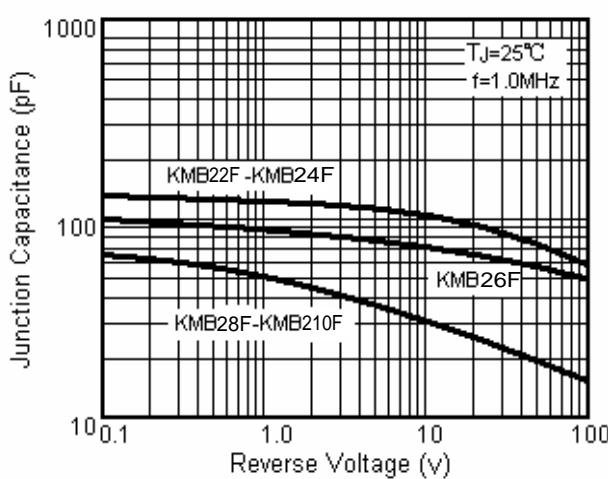


Fig.4B Typical Reverse Characteristics

