


CURRENT 1.5 Ampere
VOLTAGE RANG 50 to 1000 Volts

RB151 THRU RB157

Features

- This series is SGS listed under the Recognized Component Index, file number SZXEC1902259902
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- Ideal for printed circuit board mounting
- High surge current capability
- High temperature soldering guaranteed 265 °C/10 seconds at 5 lbs (2.3kg) tension

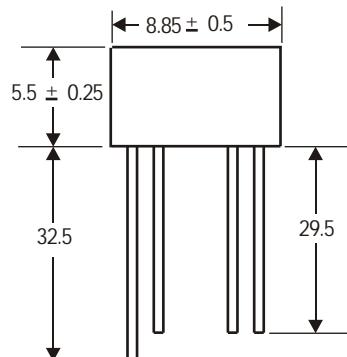


Mechanical Data

Case: Reliable low cost construction utilizing molded plastic technique

Terminals: Plated leads solderable per MIL-STD-202, Method 208

Mounting Position: Any

Weight: 0.05 ounce, 1.3 grams (approx)

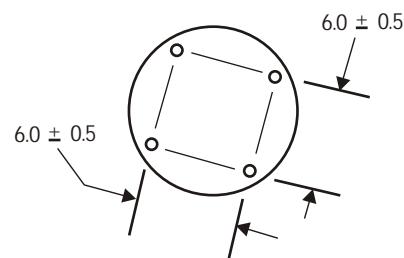

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
For Capacitive load derate current by 20%.

| Parameter | Symbol | RB151 | RB152 | RB153 | RB154 | RB155 | RB156 | RB157 | unit |
|---|-----------------------------------|-------|-------|-------|-------|-------|-------|-------|--------------------|
| Maximum repetitive peak reverse voltage | VRRM | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS bridge input voltage | VRMS | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC blocking voltage | VDC | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum average forward rectified output current at TA=25°C | IF(AV) | | | | | | | | A |
| Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method) | IFSM | | | | | | | | A |
| Rating for fusing (t<8.3ms) | I ² t | | | | | | | | A ² sec |
| Typical thermal resistance per element(1) | ReJA | | | | | | | | °C / W |
| Typical junction capacitance per element (2) | C _j | | | | | | | | pF |
| Operating junction and storage temperature range | T _J , T _{STG} | | | | | | | | °C |

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
For Capacitive load derate by 20 %.

| Parameter | Symbol | RB151 | RB152 | RB153 | RB154 | RB155 | RB156 | RB157 | Unit |
|--|--------|-------|-------|-------|-------|-------|-------|-------|------|
| Maximum instantaneous forward voltage drop per leg at 1.0A | VF | | | | | | | | V |
| Maximum DC reverse current at rated TA =25°C DC blocking voltage per element TA =100°C | IR | | | | | | | | μA |

Notes: (1)Thermal resistance from Junction to Ambemt on P.C.board mounting.

(2)Measured at 2.0MHz and applied reverse voltage of 4.0 volts.

CURRENT 1.5 Ampere
VOLTAGE RANG 50 to 1000 Volts

RB151 THRU RB157

Rating and Characteristic Curves (TA=25°C Unless otherwise noted)

Fig. 1 Derating Curve for Output Rectified Current

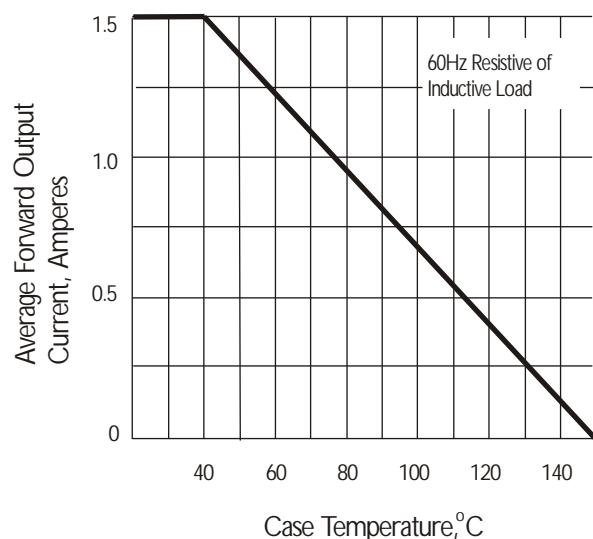


Fig. 3 Typical Instantaneous Forward Characteristics

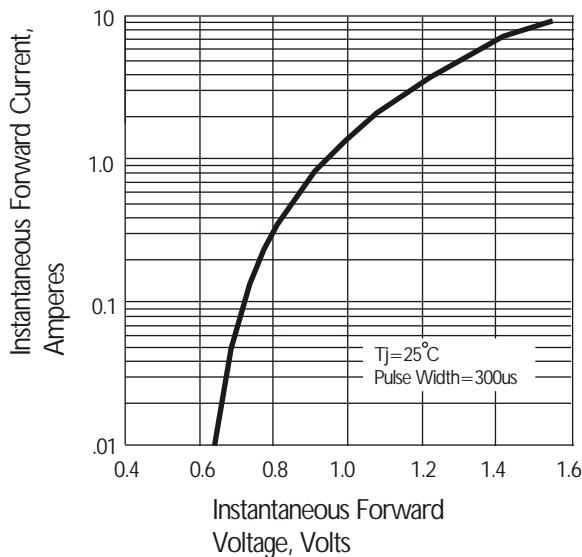


Fig. 2 Maximum Non-repetitive Peak Forward Surge Current

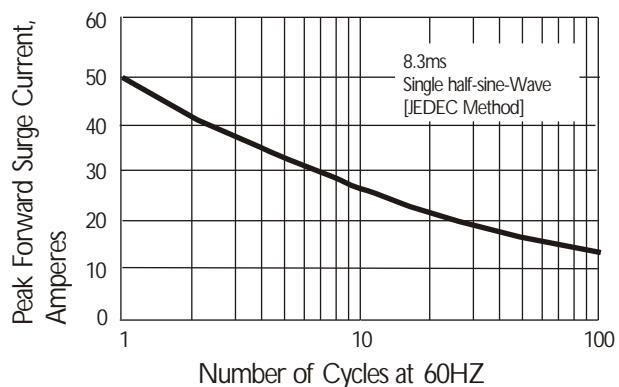


Fig. 4 Typical Reverse Characteristics

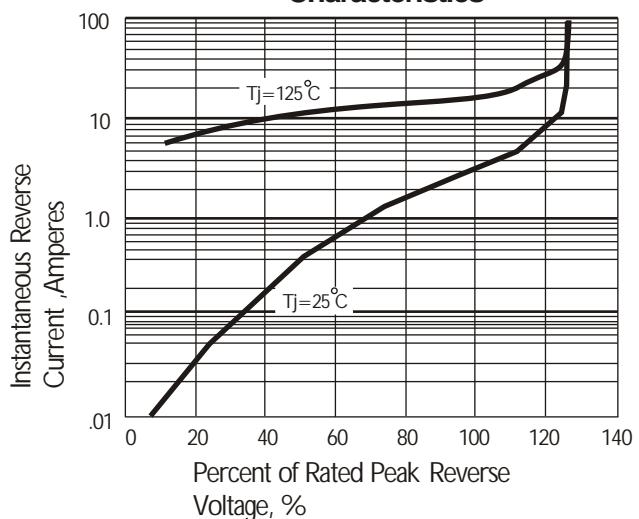


Fig. 5 Typical Junction Capacitance

